


Compuprint SALES CONTACTS

Italy: (+39) 011 9892 141 -
Other Countries: (+39) 011 9892 141 -
Email: sales@compuprint.com -
Website: www.compuprint.com -

COMPUPRINT srl
Via Lombardore, 282
10040 Leini (TO) Italia

**Industrial Printers
Transactional Printers
Thermal Printers**

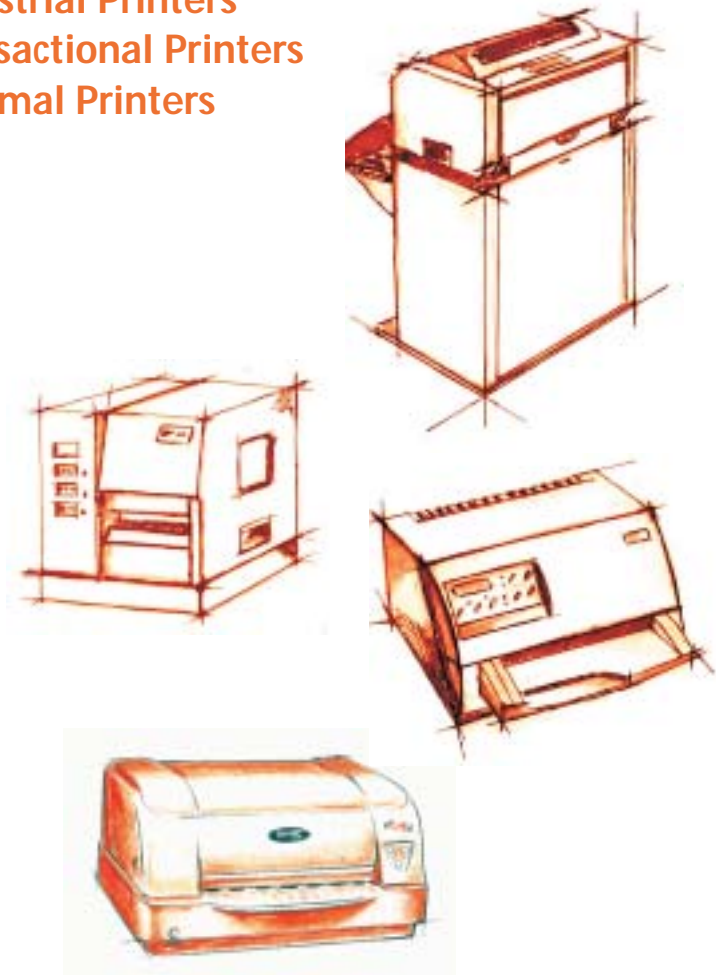



Company Charter

A multi-technology printer company. The leader in business and industrial printer markets, with the most comprehensive set of high-added printing solutions.

Company Mission

To satisfy the printing needs of business and industry with optimal solutions and the highest standards of services.



Compuprint at a Glance

A printer company

We are a single printer manufacturer. Printers and printing solutions are our core business. We offer a comprehensive range of recognised brand printers, accessories, supplies, parts and support services for professional and industrial printing requirements.

Prestigious brands

We manufacture and market a complete range of printers that bear our prestigious and respected brand.

Research and development

We are deeply committed to continuous and substantial research and development. The technologies of all of our products are driven by research that is carried out and shared amongst our dedicated development team.

World-class production facility in Italy

Our state-of-the-art production facility in Leini (Italy) designs and builds our products. This facility is maintained with the highest levels of manufacturing standards, quality

Repair Centres

Our national service providers for each region are the local service providers for all products. A Partner can also be a service provider. Their service personnel are fully trained and supported by us. We ensure that they are able to provide our factory authorised replacement parts and repair services to local customers. We support our national service providers with online technical knowledge database and direct technical support facilities.

Web Support

Each of our products are supported at our web sites. Visitors can always find a wealth of updated information about our printers, printer options, consumables and replacement parts. Sales and technical materials are readily available for downloading. The latest print drivers are always available for partner or customer downloads.

Consultancy

Our broad range of development resources is available at various levels. We provide everything from simple support, to the adaptation of existing environments, to the development and manufacturing of customized software and hardware. All these services are offered at costs that are based on the scale of each requirements.

Compuprint consumables will help you achieve the best possible results from your printer. Using non-branded or even counterfeit consumables could significantly reduce print quality. In addition, abrasive inks or wrongly formulated toner can shorten the life of your printer.

All original Compuprint consumables carry the distinctive Hologram, so you can be assured of excellent printing quality and indelibility, longest printer life, investment in research and development, environmentally-friendly products.

Like all our printers, also the original consumables comply with the strict ISO 9001 quality standard

The Compuprint's consumables include:

Black ribbon cartridges and spools for impact printers

Colour ribbon cartridges and spools for impact printers

Laser toner and Laser cartridges in monochrome and colour

Thermal Ribbons


We also offer range of options and accessories, to help you get the maximum from your printer. Network adapters, memory modules, paper-handling options, trays, tractors, printer stands and many other products are available increase your productivity and use your printer more efficient.

History

Compuprint is a printer company resulting from more than 30 years history based on historical Compuprint leadership in printing technology and customized solutions. Over 3 millions of printers installed world wide.

A Sound OEM Presence

Some of the world's most distinguished IT OEMs commission us to design and build printers that they sell with their own branding.

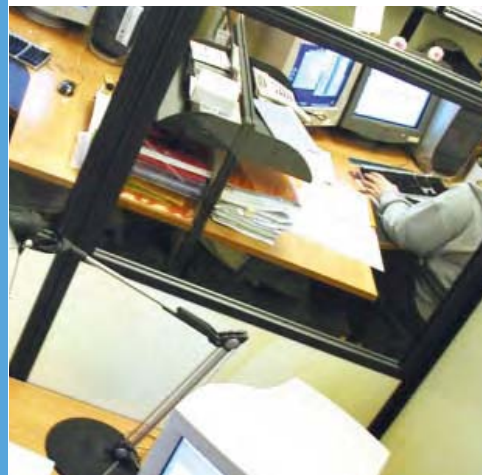

A Strong Customer Focus

Our historical presence has contributed significantly to the market's recognition of our products' quality and reliability. As a multi-technology company, we are able to offer and guarantee optimal solutions for each customer's applications. Our single dedication to printers and printing solutions, our highly skilled personnel ensure a primary focus on customer satisfaction and an ethical approach to all business approach.

An Expert Partner Network

We market our products through a family of expert partners and system integrators. These companies are each dedicated to delivering optimal printing solutions that meet each customer's unique needs. They provide a true value added services that's based on their pre-sales expertise, as well as their post-sales services. In most cases, our relationship with our partners are based on several years of experience, working together to maintain their

Our marketing partners are selected, based on their proven ability to provide value-added solutions for all of their customer's professional printing needs. We support them with the responsible and fair business practices that they need, to ensure our long term relationships with them, and to help them maintain satisfaction with their customers.

Transactional Printer

Reduce downtimes and time lags, ease of use, no errors, a wide variety of different media to be used, excellence in quality, durability and performance; these were main objectives when we designed the new Compuprint family of transactional printers. The Compuprint Transactional printers are capable of handling different types of passbooks, cut sheet paper of any type, format and weight and fanfold paper. The Compuprint transactional range offers printers for intensive transactional use and printers that can satisfy any front-office or counter application printing need. The Compuprint transactional printers are designed for use in Public Administrations, Transportation, Logistics, EDP-Sites, Post Offices and Bank environments.



6314
6 ips 203 dpi
4 ips 300 dpi



6414
10 ips 203 dpi
6 ips 300 dpi

Printing Technology	Thermal transfer or direct thermal	Thermal transfer or direct thermal
Speed (max)	6 ips (152 mm)	10 ips (254 mm)
Printable Width	4" (104 mm)	4" (104 mm)
Memory (min-max)	DRAM: 8 MB Flash: 4 MB	DRAM: 8 MB Flash: 4 MB
Paper Types	Roll or fanfold; Die cut or continuous; labels, tags & tickets; paper, film or synthetic stock	Roll or fanfold; Die cut or continuous; labels, tags & tickets; paper, film or synthetic stock
Ribbons	Wax/Wax-resin/Resin, both ink sides	Wax/Wax-resin/Resin, both ink sides
Resolution	203 (8 dots/mm); 300 dpi (12 dots/mm)	203 (8 dots/mm); 300 dpi (12 dots/mm)
Emulations	Compuprint: CZL (Zebra), CDL (Datamax) and EPL II	Compuprint: CZL (Zebra), CDL (Datamax) and EPL II
Interfaces	Standard: Parallel, Serial, USB Optional: Ethernet 10/100	Standard: Parallel, Serial, USB Optional: Ethernet 10/100
Media Handling	8.0" (20.9 cm) roll size Transmissive and reflective sensor standard; Tear Off Mode: individual label tear off Tear Off Strip: labels strips tear off Cut Label: cut to length	8.0" (20.9 cm) roll size Transmissive and reflective sensor standard; Tear Off Mode: individual label tear off Tear Off Strip: labels strips tear off Cut Label: cut to length
Media Width	0.75 to 4.7 inches (19 - 120 mm)	0.75 to 4.7 inches (19 - 120 mm)
Media Thickness	0.0635 - 0.25 mm	0.0635 - 0.25 mm
Fonts	9 selectable inc. OCR-A, OCR-B. Up to 24x font expansion Hor. & Vert. Triumvirate smooth fonts 6 up to 48 pts. Code 39, Interleaved 2 of 5, EAN 8, EAN 13, UPC-A, UPC-E, Code 128 Code 93, Codabar, HIBC, PDF 417 Postnet, Plessey, Maxicode, Datamatrix	9 selectable inc. OCR-A, OCR-B. Up to 24x font expansion Hor. & Vert. Triumvirate smooth fonts 6 up to 48 pts. Code 39, Interleaved 2 of 5, EAN 8, EAN 13, UPC-A, UPC-E, Code 128 Code 93, Codabar, HIBC, PDF 417 Postnet, Plessey, Maxicode, Datamatrix
Dimensions (W/D/H) - Weight	270/360/270 mm - 11 Kg	270/360/270 mm - 11 Kg
Consumables	C6000-WC4: Ribbon Wax C6000-WR4: Ribbon Premium Wax C6000-RB4: Ribbon Wax/Resin 6314-PH6: Replacement Printhead 6314H-PH4: Replacement Printhead 300dpi	C6000-WC4: Ribbon Wax C6000-WR4: Ribbon Premium Wax C6000-RB4: Ribbon Wax/Resin 6414-PH10: Replacement Printhead 6414H-PH6: Replacement Printhead 300dpi
Ordering Information	6314DT0A1 6314-DT Direct Thermal 6314TT0A1 6314-TT Thermal Transfer 6314HT0A1 6314-H Thermal Transfer 300dpi Peel and Rewind Versions	6414DT0A1 6414-DT Direct Thermal 6414TT0A1 6414-TT Thermal Transfer 6414HT0A1 6414-H Thermal Transfer 300dpi Peel and Rewind Versions

Thermal Printers

Solid and compact, the Compuprint 6000 Series represent the ideal solution for intensive, high quality print applications. With print speeds from 4 inches per second to 10 inches per second the Compuprint 6000 series is capable of handling the most intensive print requirements.

Compuprint's new leading edge 6000 Series thermal printers are setting the highest standards for quality; compatibility and remote control networked management with assured forward technology compatibility. A standard international character set is provided with a choice of nine fonts, which can be supplemented with many downloadable "soft fonts".

Most commonly used bar codes are supported on the Compuprint 6000 Series and graphics images may be stored to enhance label design.

Typical Applications

- Compact environment
- Goods in and material tracking
- Shipping and receiving labelling
- UPC and EAN product marking
- Manufacturing component labelling.

Serial Matrix Printers

Compuprint Serial matrix printers are the professional answer for applications where other printing technologies are not suitable: from the printing of modules to multi-page or multi-format documents. Also, these printers are used in situations in which flexibility, reliability, long print runs, and low operating costs are appreciated. The Compuprint serial matrix printers offer the possibility to print on various media, to guarantee long unattended jobs without paper jam, and to produce multi-copies for a large number of professional users.

The family offers 9, 18 and 24 pin models, able to print up to 1 + 7 copies, at a speed of 400/1300 characters per second. Combined with the legendary reliability, Compuprint Serial Matrix printers offer unbeatable value for money in this market segment.



Transactional Printers



Compuprint

MDP 30 FB
24 pins 400 cps

MDP 40B
24 pins 400 cps

MDP 40T plus
24 pins 350 cps

Printing Technology	24 pins	24 pins	24 pins
Speed (max)	up to 450 cps @15 cpi	up to 600 cps @15 cpi	up to 480 cps @15 cpi
Line Length (@ 10 cpi)	94 columns	94 columns	94 columns
Throughput (ISO/IEC 10561)	-	-	300 pph
Graphic Resolution	360 x 360 dpi	360 x 360 dpi	360 x 360 dpi
Colour	-	-	-
Buffer	Up to 32 KB	Up to 32 KB	Up to 32 KB
Resident Fonts	Courier, Gothic, Script, Prestige, OCR-A, OCR-B, Presentor, Boldface, Draft	Courier, Gothic, Script, Prestige, OCR-A, OCR-B, Presentor, Boldface, Draft	Courier, Gothic, Script, Prestige, OCR-A, OCR-B, Presentor, Boldface, Draft
Emulations	IBM PP 2390+, IBM XL24E/AGM, Epson L0870	IBM PP 2390+, IBM XL24E/AGM, Epson LQ 570/870, IBM 4722, Olivetti PR40 plus/PR2/PR2845, IBM 9068	IBM PP 2390+, IBM XL24E/AGM, Epson LQ 870
Interfaces	Bi-directional Parallel IEEE 1284 Serial RS-232C Automatic interface switching	Bi-directional Parallel IEEE 1284 Serial RS-232C Automatic interface switching	Bi-directional Parallel IEEE 1284 Serial RS-232C Automatic interface switching
Noise	54 dBA	54 dBA	54 dBA
Print Head Life	400 million characters	400 million characters	400 million characters
Paper Handling	Cut sheet - continuous form - envelopes labels	Cut sheet - passbook - envelopes labels	Cut sheet - continuous form - envelopes labels
Fanfold Handling	Rear push tractors	-	Rear push tractors
Cut Sheet Handling	Front loading	Front loading	Front loading
Copies	1 + 5	1 + 5	1 + 7 (chemical paper); 1 + 8 (carbon paper)
Paper Width	70/248 (automatic alignment) - 235 mm	70/90 (automatic alignment)-240/226 mm	70/246 (automatic alignment) - 235 mm
Special Functions	Automatic Gap Adjustment (AGA), Auto Alignment, Auto Border Recognition, Optical Mark Reading, Zero tear off, Automatic set up	Automatic Gap Adjustment (AGA), Auto Alignment, Auto Border Recognition, Optical Mark Reading, Horizontal and Vertical Passbook Handling, Automatic set-up (automatic recognition of marked values)	Zero tear off; Automatic gap adjustment (AGA); Auto alignment; Auto border recognition; Optical mark reading, Automatic set up
Dimensions (W/D/H) - Weight	390 / 320/ 210 - <14 kg	390/320/210 mm - 14 Kg	390/320/210 mm - 14 Kg
Options	-	-	-
Consumables	PRK4287-6: black ribbon cartridge	PRK4287-6: black ribbon cartridge	PRK4287-6: black ribbon cartridge
Ordering Information	PRT0423: Compuprint MDP 30 FB	PRT0419: Compuprint MDP 40 B	PRT0434: Compuprint MDP 40 T plus

Compuprint

10300
24 pins 1300 cps 860 PPH



Printing Technology	24 pins
Speed (max)	up to 1300 cps @10cpi
Line Length (@ 10 cpi)	136 columns
Throughput (ISO/IEC 10561)	860 pph
Graphic Resolution	360 x 360 dpi
Colour	-
Buffer	up to 128 KB
Resident Fonts	Draft, Courier, Gothic, Prestige, Script, Presentor, OCR-A, OCR-B
Emulations	IBM Proprinter XL24/XL24AGM, IBM 2391+, Epson ESC/P LQ Series, ANSI Compuprint Native Commands 1) Parallel, Serial, USB 2.0 2) Parallel, Ethernet 10/100 BaseT (Automatic Interface Switching)
Interfaces	
Noise	<54 dBA
Print Head Life	800 million characters
Fanfold Handling	Front push tractor
Driver and SW	Windows 9X/2000/XP/Vista NetViewMaster (Remote Manager)
Copies	1+7
Special Functions	Automatic paper path alternation, Automatic gap adjustment (AGA), Zero tear off, Automatic paper parking, Fast graphic mode, Code update capability, up to 4 configuration selectable and printable
Dimensions (W/D/H) - Weight	720/400/350 mm - 33 Kg
Options	2nd front push tractor pedestal
Power Supply	Universal 100 to 220v
Consumables	PRKN102-1: long life black ribbon 25MC
Ordering Information	PRTN103: Compuprint 10300 Par/Ser/USB PRTN103N: Compuprint 10300 Par/LAN



Forms up to A3 format



Compuprint

9065
24 pins 720 cps

9080
24 pins 900 cps

9300
18 pins 1300 cps

Printing Technology	24 pins	24 pins	18 pins
Speed (max)	up to 720 cps @10cpi	up to 900 cps @10cpi	up to 1300 cps @10cpi
Line Length (@ 10 cpi)	136 columns	136 columns	136 columns
Throughput (ISO/IEC 10561)	600 pph	660 pph	860 pph
Graphic Resolution	360 x 360 dpi	360 x 360 dpi	360 x 360 dpi
Colour	no	no	no
Buffer	up to 128 KB	up to 128 KB	up to 128 KB
Resident Fonts	Draft, Courier, Gothic, Prestige, Script, Presentor, OCR-A, OCR-B	Draft, Courier, Gothic, Prestige, Script, Presentor, OCR-A, OCR-B	Draft, Courier, Gothic, DP Text, OCR-A, OCR-B
Emulations	IBM Proprinter XL24/XL24, IBM 2391 Epson ESC/P LQ Series, ANSI Compuprint Native Commands	IBM Proprinter XL24/XL24, IBM 2391 Epson ESC/P LQ Series, ANSI Compuprint Native Commands	IBM Proprinter III XL, IBM 2381 Epson FX Series, ANSI Compuprint Native Commands
Interfaces	1) Parallel, Serial, USB 2.0 2) Parallel, Ethernet 10/100 BaseT (Automatic Interface Switching)	1) Parallel, Serial, USB 2.0 2) Parallel, Ethernet 10/100 BaseT (Automatic Interface Switching)	1) Parallel, Serial, USB 2.0 2) Parallel, Ethernet 10/100 BaseT 3) Parallel, IPDS over LAN (Automatic Interface Switching)
Noise	<54 dBA	<54 dBA	<54 dBA
Print Head Life	800 million characters	800 million characters	800 million characters
Fanfold Handling	Front push tractor	Front push tractor	Front push tractor
Driver and SW	Windows 9X/2000/XP/Vista NetViewMaster (Remote Manager)	Windows 9X/2000/XP/Vista NetViewMaster (Remote Manager)	Windows 9X/2000/XP/Vista NetViewMaster (Remote Manager)
Copies	1+7	1+7	1+9
Special Functions	Automatic paper path alternation, Automatic gap adjustment (AGA), Zero tear off, Automatic paper parking, Fast graphic mode, Code update capability, up to 4 configuration selectable and printable 670/450/320 mm - 21 Kg	Automatic paper path alternation, Automatic gap adjustment (AGA), Zero tear off, Automatic paper parking, Fast graphic mode, Code update capability, up to 4 configuration selectable and printable 670/450/320 mm - 21 Kg	Automatic paper path alternation, Automatic gap adjustment (AGA), Zero tear off, Automatic paper parking, Fast graphic mode, Code update capability, up to 4 configuration selectable and printable 670/450/320 mm - 21 Kg
Dimensions (W/D/H) - Weight	2nd front push tractor Pedestal	2nd front push tractor Pedestal	2nd front push tractor Pedestal
Power Supply	Universal 100 to 220v	Universal 100 to 220v	Universal 100 to 220v
Consumables	PRKN407-1: black ribbon 15 MC	PRKN102-1: long life black ribbon 25 MC	PRKN102-1: long life black ribbon 25 MC
Ordering Information	PRTN965: Compuprint 9065 Par/Ser/USB PRTN965N: Compuprint 9065 Par/LAN	PRTN980: Compuprint 9080 Par/Ser/USB PRTN980N: Compuprint 9080 Par/LAN	PRTN9300: Compuprint 9300 Par/Ser/USB PRTN9300N: Compuprint 9300 Par/LAN PRTN9300I: Compuprint 9300 Par/LAN-IPDS



Compuprint SP 40

24 pins 600 cps

Printing Technology	24 pins
Speed (max)	up to 600 cps @ 15 cpi
Line Length (@ 10 cpi)	94 columns
Throughput (ISO/IEC 10561)	-
Graphic Resolution	360 x 360 dpi
Colour	-
Buffer	Up to 64 KB
Resident Fonts	Courier, Gothic, Script, Prestige, OCR-A, OCR-B, Presentor, Boldface, Draft
Emulations	IBM PP 2390+, IBM XL24E/AGM, Epson LQ 2550 LQ 1170, IBM 4722, Olivetti PR40 plus, PR2, PR 2845, IBM 9068
Interfaces	1) Parallel, Serial 2) Parallel, Serial, USB 3) Parallel, Serial, Ethernet 10/100 BaseT (Automatic Interface Switching)
Noise	<55 dBA
Print Head Life	400 million characters
Paper Handling	Cut sheet - passbook - envelopes labels
Power Supply	Universal 100 to 220v
Cut Sheet Handling	Front insert, auto aligned
Copies	1 + 6
Paper Width	65 (automatic alignment) - 244 mm
Special Functions	Automatic gap adjustment (AGA) Auto alignment: Auto border recognition Optical mark reading, Horizontal and vertical passbook handling, Automatic set-up (automatic recognition marked values)
Dimensions (W/D/H) - Weight	400/200/295 mm - 12 Kg
Options	-
Consumables	PRK5287-6: black ribbon cartridge 5MC PRK5290-6: black ribbon cartridge 15MC
Ordering Information	PRT0519: Compuprint SP 40 Par/Ser PRT0520: Compuprint SP 40 Par/Ser/USB PRT0519-LAN: Compuprint SP 40 Par/Ser/LAN



SP 40 Special Versions

- **Passport**
High thickness document printing
- **Scanner - MICR - MSR/W**
Image and character's recognition
- **Post-Office**
Post-desk documents handling
- **Ticketing**
Ticket counter documents printing



Scanner



0 1 2 3 4 5 6 7 8 9 10 11 12

0 1 2 3 4 5 6 7 8 9 10 11 12



Common Features

Printing Technology	24 pins
Speed (max)	up to 600 cps @15cpi
Line Length (@ 10 cpi)	94 columns
Print Head Life	400 million characters
Interfaces	Parallel, Serial, USB, Ethernet 10/100
Paper handling	cut sheet, passbook, cheque
Consumable	PRK5287-6: black ribbon 4MC PRK5290-6: black ribbon 15MC
Dimensions (W/D/H) - Weight	400/295/200 mm - 12 Kg

SP 40 Scanner

Scanner	Colour, A4 size, front/rear 16 MioColours, 256 Grey scale levels Speed: 12"/sec B/W - 5"/sec colour
Resolution	up to 600 dpi
Ordering Information	PRT0531 - Compuprint SP40 dual scanner

SP 40 MSR/W-Micr

Head MSR/W	Horizontal magnetic strip, code 4 bit Character ASCII table 30-3F code Field duplication, DIN 32774, IBM 3604, Burroughs
Head Micr	CMC7, E13B - Reading speed 0,7m/s
Low error rate, High decoding speed and efficiency	
Ordering Information	PRT0540 - Compuprint SP40 MSR/W-Micr


SP 40 All-In-One Scanner-MSR/W-Micr

Scanner	Colour, A4 size, front/rear 16 MioColours, 256 Grey scale levels Speed: 12"/sec B/W - 5"/sec colour
Resolution	up to 600 dpi
Head MSR/W	Horizontal magnetic strip, code 4 bit Character ASCII table 30-3F code Field duplication, DIN 32774, IBM 3604, Burroughs
Head Micr	CMC7, E13B - Reading speed 0,7m/s
Low error rate, High decoding speed and efficiency	
Ordering Information	PRT0532 - Compuprint SP40 Scanner-MSR/W-Micr

Compuprint



3056/N
24 pins 500 cps



4051-4056 plus
9-24 pins 480 cps

Printing Technology	24 pins	9 - 24 pins
Speed (max)	400 cps - 500 cps @10cpi HSD	up to 600 cps @15cpi
Line Length (@ 10 cpi)	136 columns	136 columns
Throughput (ISO/IEC 10561)	365 pph	390 pph
Graphic Resolution	360 x 360 dpi	240 x 144 dpi - 360 x 360 dpi
Colour	-	-
Buffer	up to 128 KB	up to 128 KB
Resident Fonts	Draft, Courier, Roman, OCR-A, OCR-B Script, Prestige, Orator, Sans Serif	Draft, Courier, Gothic, OCR-A, OCR-B, Script, Prestige, Presentor, Boldface
Emulations	Epson LQ-ESC/P	IBM Proprinter XL24/AGM, Epson LQ IBM Proprinter XLIII, Epson FX
Interfaces	Parallel, Serial, USB (3046-3056) Parallel, USB, Ethernet (3046N-3056N)	Bi-directional Parallel IEEE 1284 Serial RS-232C/422A:Automatic interface switching
Noise	56 dBA	53 dBA
Print Head Life	300 million strokes	400 million characters
Fanfold Handling	Rear/Front tractor Width: 76 - 406 mm	Rear push tractor Width: 76 - 406 mm (4051-4056) 76 - 304 mm (4051N-4056N)
Cut Sheet Handling	Front - Top loading Width: 101 - 406 mm	Top loading Width: 101 - 406 mm (4051-4056) 102 - 420 mm (4051N-4056N)
Copies	1+5	1+5
Special Functions	Automatic parking Zero tear off Bar Codes	Automatic parking Zero tear off Bar Codes
Dimensions (W/D/H) - Weight	623/395/173 mm - 13 Kg	615/310/173 mm - 15 Kg (4051-4056)
Options	Second tractor	
Consumables	PRK3050-8: black ribbon cartridge	PRK4050-6: black ribbon cartridge
Ordering Information	PRTN3046/N: Compuprint 3046/N PRTN3056/N: Compuprint 3056/N	PRTN456: Compuprint 4056 plus PRTN451: Compuprint 4051 plus