


Manual or Automatic Banding for 20/30/40/50 mm band width

BM2530W

- Compact Design
- 25 bundles/min.
- Band guides adjustable between 120 to 200 mm
- Thermoband PE-coated or PP-film band
- Manual or Automatic banding operation

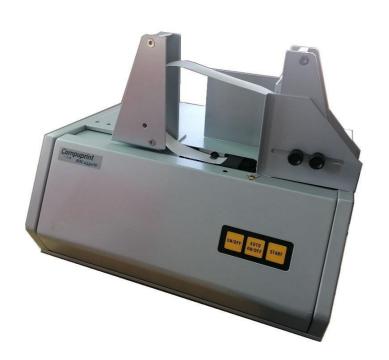

Applications



RETAILS (FLYERS & BOOKS)



BANKS & POSTOFFICES (BANKNOTES)

BM2530W Automatic Banding Machine

Features

Compact Design
Solid and Precise mechanical construction
Manual or Automatic banding operation
Closing the band by temperature sealing
Adjustable temperature sealing
Adjustable band guides
Adjustable try square to suite the product size
Adjustable band loop
Continuously adjustable banding tension



TECHNICAL DATA BM2530W:

Product Dimensions	Width	25 to 250 mm
	Height	5 to 200 mm
Band Guides adjustable between	120 to 200 mm	
Working Speed	25 bundles/min.	
Types of Band	 Paper "kraft" (thermoband) – PE coated 	
	PP_band / film (polypropylene)	
Band Width	30 mm (20-40-50 mm on request)	
Band Roll outer diameter	145 mm max	
Band Roll Inner diameter	50 mm	
Weight	32,5 Kg	
Sound Level	Corresponding to DIN 45635/27	
Power Supply	220/230 Vac, 50 Hz - 180VA - 1 Ph	
	110 Vac, 60 Hz – 180VA – 1 Ph	
	Different power supply on request	
Dimensions	490 x 320 x 350 mm (L-W-H)	
Regulatory	CE and RoHS	

PRODUCT MODEL

Wide Automatic/Manual Banding Machine - Band Width 30 mm.

BM2530W



Compuprint Sales Contact

Italy: +39 011 9892141–133 email: sales@compuprint.com website: www.compuprint.com



